


Solectric 15

Orb Energy

Results based on test procedures detailed in IEC 62257-9-5, ed. 2.0

Verify Online: www.lightingglobal.org/specs/orb-solectric

Valid Until: October, 2014

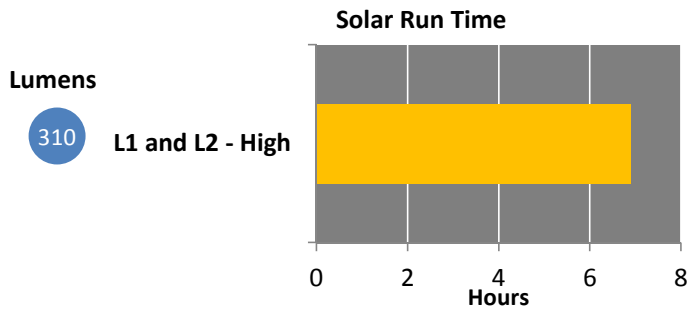

 **Meets Lighting Global Minimum Quality Standards**

 **Mobile Charging**

2 Light Points

Warranty Information

A 1-year warranty (see detailed terms for more information).

Performance Details

Performance Measure	Brightness Setting***
	L1 and L2 - High
Full battery run time* (hours)	11
Run time per day of solar charging* (hours)	6.9
Total light output (lumens)	310
Total area with illumination > 25 lux** (m ²)	1
Total lighting service (lumen-hours / solar-day)	2100

* Run time estimates do not account for mobile phone charging or other auxiliary loads; the run time is defined as the time until the output is 70% of the initial, stabilized output.

** Total area with illumination > 25 lux is determined by the maximum area with adequate illumination at a 0.75 m distance and at the distance from which the product would normally provide task lighting service.

*** Additional brightness settings (not tested): L1 - high, L2 - mid; L1 and L2 - mid; L1 - high, L2 - low; L1 - mid, L2 - low; L1 and L2 - low, L1 - high, L1 - mid, L1 - low

Lighting Details

Lamp type	LED
Description of light points	30 LEDs per light point
Colour characteristics	CRI 79 CCT "Cool" (5000-7000 K)
Distribution type	Wide
Lumen maintenance	98% of the original output remains after 2,000 hours run time

Special Features

Mobile charging	5 V at 500 mA USB socket output with adapters to charge mobile phone from battery
Indicators	Green LED = charging indicator Yellow LEDs = battery state of charge indicators Red LED = low battery or over-charge indicator

Durability

Overall durability and workmanship	Pass
Durability tests passed	Drop test, switch and connector cycling, strain relief test, physical ingress protection test, and protection from occasional rain

Solar Details

PV module type	Amorphous silicon
PV maximum power point	6.7 watts

Battery Details

Battery replaceability	Easily replaceable with common tools
Battery chemistry	Lithium iron phosphate
Battery package type	--
Battery capacity	3000 mAh
Battery nominal voltage	12.8 V
Appropriate battery protection circuit	Pass

Product Details

Manufacturer name	Orb Energy
Product name	Solectric 15
Product model / ID number	SL0015DC12820
Contact information	info@orbenergy.com
Website	www.orbenergy.com

SSS Information

Specs sheet expiration date	October, 2014
Minimum Quality Standards Framework Version	2012
Revision	2013.09