

Radiance Solar Lantern


Freeplay Energy

Verify Online:

www.lightingglobal.org/products/fe-rsl2

Results based on test procedures detailed in IEC 62257-9-5, ed. 2.0

Valid Until: January 31, 2019

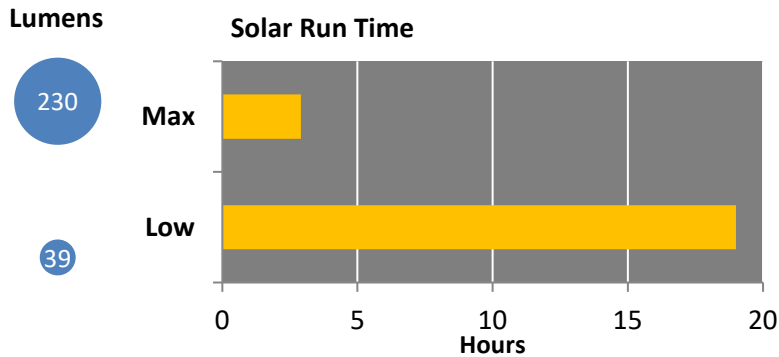

Meets Lighting Global Quality Standards



Mobile Charging



1 Light Point

Warranty Information

A 1-year warranty covering manufacturing defects.

Performance Details

Performance Measure	Brightness Setting***	
	Max	Low
Full battery run time* (hours)	9.4	66
Run time per day of solar charging* (hours)	2.9	19
Total light output (lumens)	230	39
Total area with illumination > 50 lux** (m ²)	--	--
Total lighting service (lumen-hours / solar-day)	670	740

* Run time estimates do not account for mobile phone charging or other auxiliary loads; the run time is defined as the time until the output is 70% of the initial, stabilized output.

** Total area with illumination > 50 lux is determined by the maximum area with adequate illumination at a 0.75 m distance and at the distance from which the product would normally provide task lighting service.

*** Additional brightness settings (not tested): Medium

Lighting Details

Lamp type	LED
Description of light points	12 LEDs are arranged as a column within a frosted enclosure
Colour characteristics	CRI 86 CCT "Daylight" (>5000 K)
Distribution type	Omnidirectional
Lumen maintenance	100% of the original output remains after 2,000 hours run time

Special Features

Mobile charging	Adapters included to charge mobile phone from battery
-----------------	---

Durability

Overall durability and workmanship	Pass
Durability tests passed	Drop test, switch and connector cycling, strain relief test, physical ingress protection test. Protection from frequent rain; met by IPX3.

Solar Details

PV module type	Polycrystalline silicon
PV maximum power point	2 watts

Battery Details

Battery replaceability	Easily replaceable with common tools, but attempting replacement will void warranty.
Battery chemistry	Lithium-ion
Battery package type	2 x 18650
Battery capacity	4900 mAh
Battery nominal voltage	3.7 V
Appropriate battery protection circuit	Pass

Product Details

Manufacturer name	Freeplay Energy
Product name	Radiance Solar Lantern
Product model / ID number	RSL2
Contact information	vjenkins@freeplayenergy.com
Website	www.freeplayenergy.com

SSS Information

Specs sheet expiration date	January 31, 2019
Quality Standards Framework Version	2016
Revision	2016.10